

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
21 October 2004 (21.10.2004)

PCT

(10) International Publication Number
WO 2004/090586 A1

(51) International Patent Classification⁷: G02B 5/02, F21V 11/14, G09F 13/04

(74) Agent: SANGIACOMO, Fulvia; Biesse S.r.l., Corso Matteotti 42, I-25122 Brescia (IT).

(21) International Application Number:
PCT/IT2004/000157

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 29 March 2004 (29.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
BS2003U000037 7 April 2003 (07.04.2003) IT

(71) Applicant (for all designated States except US): FLOS S.p.A. [IT/IT]; Via A. Faini 2, I-25073 Bovezzo (IT).



(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

(72) Inventor; and

(75) Inventor/Applicant (for US only): CITTERIO, Antonio [IT/IT]; Via Cerva 4, I-Milano (IT).

[Continued on next page]

(54) Title: LUMINOUS DIFFUSER WITH DIFFERENTIATED LIGHT EMITTING PARTS FOR LIGHTING EQUIPMENT

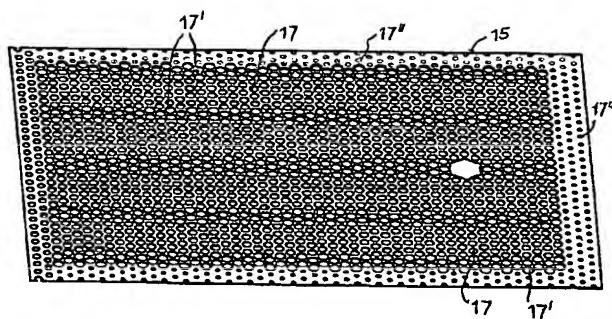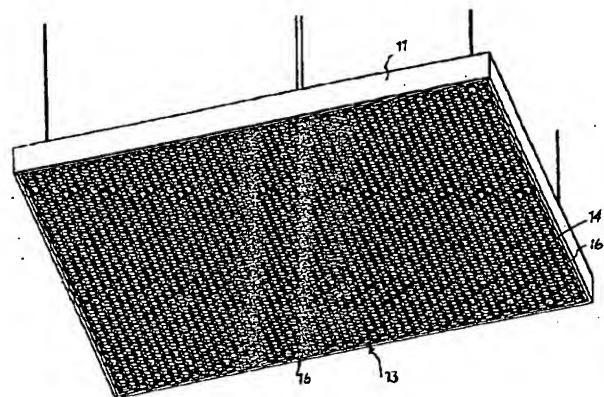

(57) Abstract: This invention concerns a light diffuser for lighting equipments which is made up of a front plate (14) with holes or openings (16) distributed uniformly over all its surface, and an internal sheet (15) associated with the internal surface of the front plate and having holes of a different diameter (17, 17', 17'') along different parts of its length and each positioned in line with an opening in the front plate. The front plate and the internal sheet may be two associated bodies or form a single integrated body.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*